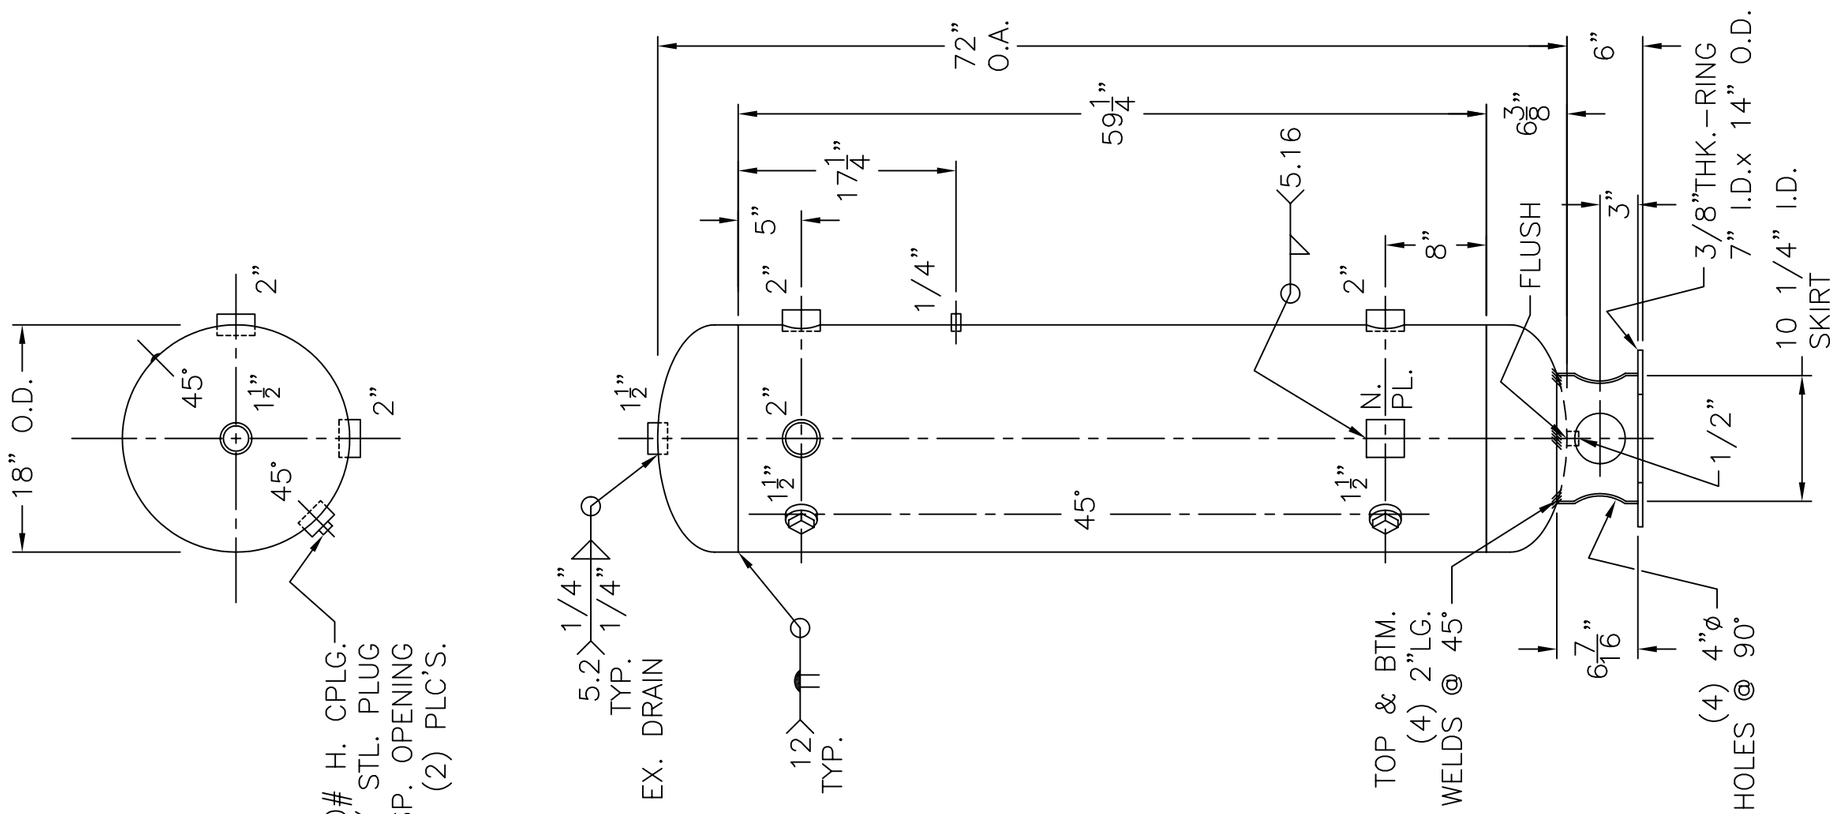

3) WELD TO OR JOINING SA–612 HAVE W.P.S. W/ SUFFIX "B".
2) ALL CPLGS. ARE 3000# HALF, EXCEPT 1/4"–FULL.
NOTE: 1) HYDRO @ 731 PSIG. MIN.

SHELL / HEADS	.260" SA–612 2:1 S.E.	18–VK–73–F	REV. 11–27–02
	TRIM		DATE: 6–14–99
		FOR: HANSON STANDARD	
		VERT. AIR TANK	
	.288" SA–455		
	(.270" MIN.)		
		INSIDE: UNPAINTED	
M.A.W.P.	550 PSIG. @ 400 °F		
M.D.M.T.	–20 °F @ 550 PSIG.	OUTSIDE: PRIME	
ASME. SECTION VIII	DIV. 1, 2001 ADD. 2002	CAD–"B" UNDER "STD"–SERIES	
X–RAY:	RT–4 SPOT L.S. ONLY	BY: E.S.	SCALE: 1"=12"
GALLONS:	73 WT. 389 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		1924 COMPTON AVE.	
N.B.		LOS ANGELES, CA 90011	